

Materials of Construction

Filter Media: Nylon


Construction Notes

1. Spun bonded from lot controlled, FDA compliant materials.
2. Contains no solvents, binders or anti-static agents.
3. Constructed from a strong, self supporting structure with high chemical compatibility.

Technical Data


Micron Rating (µm)	1, 5, 10, 20
Length (")	9", 20, 30, 40
Maximum Operating Temperature (°C)	120
Maximum Operating Pressure Differential (bar) at Temperature (°C)	2.5 at 21

End Cap Options

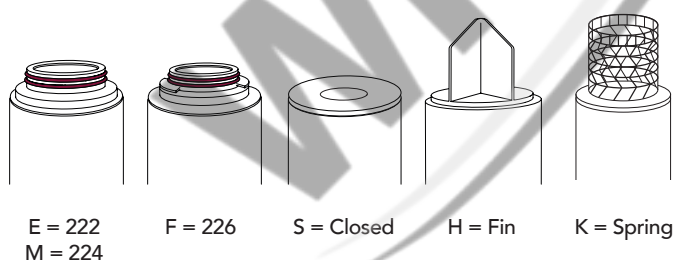

Flow Rate vs. Pressure Drop

Pressure drop data obtained using water at 20°C per 9µm filter. Data represented using its micron rating in the chart below.

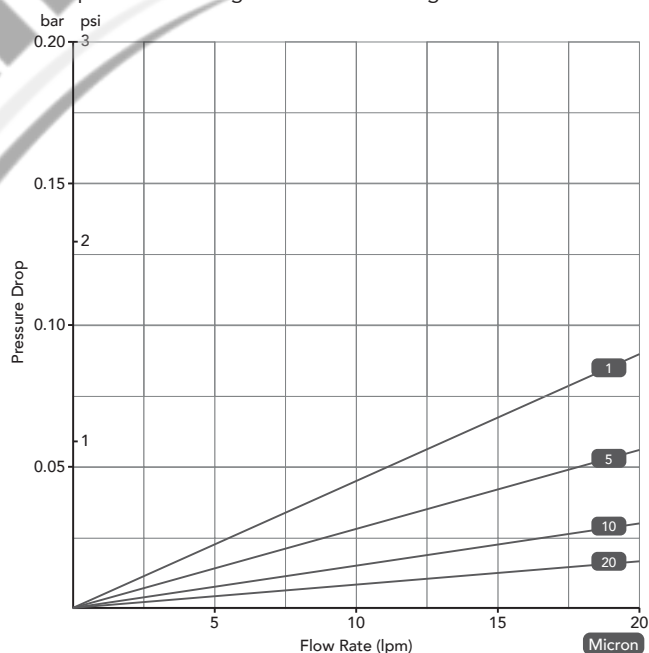

Dimensions and End Cap Configurations

Filter Length (")	Total Filter Length Including End Cap Configurations (nominal mm)					Outer Diameter (nominal mm)	Inner Diameter (nominal mm)
	Blank	EH/MH	ES/MS	FH	XK		
9"	250	317	278	322	310	63	28
20	508	575	536	580	568	63	28
30	762	829	790	834	822	63	28
40	1016	1083	1044	1088	1076	63	28