



Depth Cartridge

for Viscous Fluids and Critical Filtration

www.fileder.co.uk

Wrekin Water




fileder
EXPERTS IN FILTRATION

CLEAL® CP2 Filter Cartridge


Fine fibre diameter and a uniform graded porous structure designed to excel in highly viscous as well as challenging compatibility applications.

Old Technology

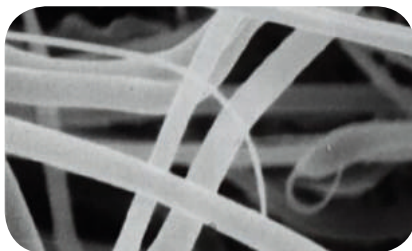

Unbonded, free moving, inconsistent fibre diameter construction

New Technology

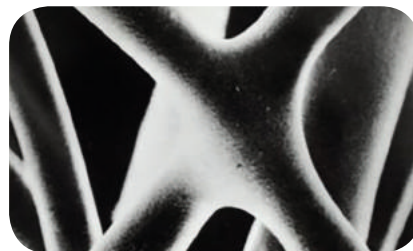

CP2 with nodally fused, bicomponent rigid fibre matrix

Typical Applications

Filtration, essential to many modern products and processes, has become ever more critical as quality expectations and technology requirements for finer and more consistent results develop and increase.

The bicomponent fibre fused matrix used in the CP2 ensures consistent performance throughout filter life without particle unloading, media channelling, fibre release or media compression under differential pressure.



Adhesives & Resins



Paints & Inks



Automotive



Bicomponent Fibre Technology

Fibre expertise and rigid technology

CLEAL® CP2 delivers clear benefits due to the bonded nodes, fine fibre diameter and uniform or graded porosity which form a highly porous, rigid structure, capable of removing oversized contaminants, agglomerates and deformable gels whilst allowing non-defect causing particles to pass through without stripping or premature filter blockage.

Rigid Fused Fibre Matrix

The dual extrusion process uses two polymers, which when heated fuses the lower melting point material to create a three-dimensional bond where fibres touch.

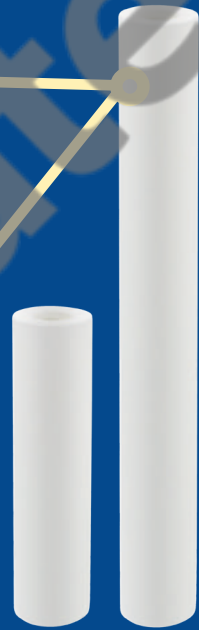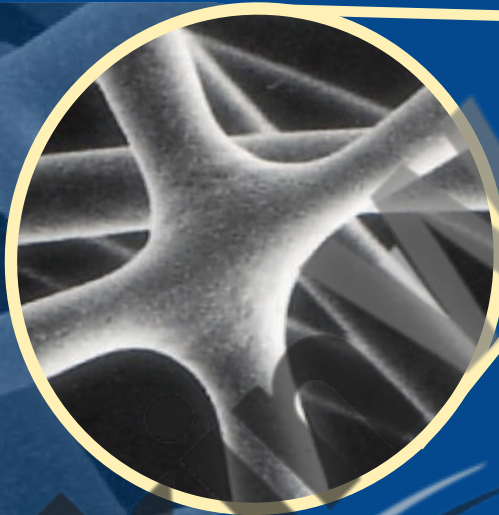

Dual Polymer


Low Melting Point Material

High Melting Point Material

Bonded bicomponent fibre construction creates a strong 3D filter matrix.

The extra fine fibres deliver excellent flow and consistent dirt holding voids, resulting in long service life.

Efficiency vs Increasing ΔP^*

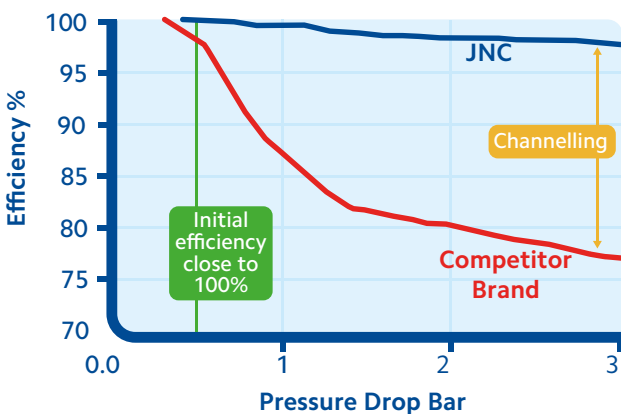

Typically, as pores become blocked and flow finds alternative paths, pressure drop increases. This increase in ΔP can cause channelling and distortion.


The CP2, with its nodally fused structure, resists high pressures to maintain integrity for consistent filtration preventing the release of previously trapped contaminants, push through of gels and rating creep.

*based on manufacturer's internal testing





Wrekin Water

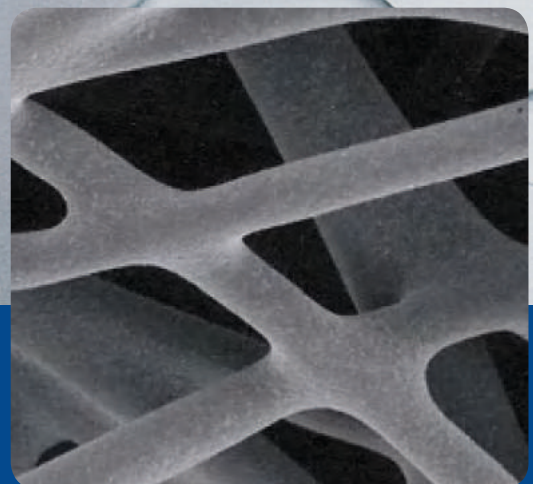

CP2 Filter Cartridge

1-350 micron

Constructed from thermally bonded bicomponent polypropylene fibres, CP2 creates a rigid, dimensionally stable filter matrix with excellent dirt holding capacity and chemical resistance.

Suitable for use in highly viscous and challenging applications, the cartridge removes defect causing particles and gels without stripping small, acceptable or desired particles.



Thermally bonded bicomponent polypropylene fibres

- Rigid structure capable of resisting high differential pressures
- No fibre release, gel push through or micron rating drift
- Consistent performance throughout filter life

Micron (µm)

1	3	5	10	25	50	75
100	200	350				

Length (")

9¾	10	19½	20	29¼	30	39
	40					


End-cap options available. Contact us for details

Specification

Max. Operating Temperature
80°C

Max. Operating Differential Pressure
5.5 bar @ 20°C

Food Compliant (EU)
No. 10/2011

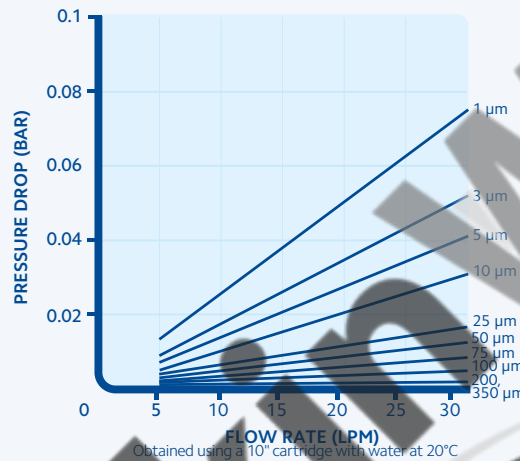

Efficiency Comparison Chart*

Grade	Absolute µm 99.9%	Nominal µm	ProBond™ Nominal µm	Micro-Klean Nominal µm
CP2-01	15	1	-	1
CP2-03	25	3	-	3
CP2-05	30	5	2	5
CP2-10	35	10	5	10
CP2-25	45	25	10	25
CP2-50	70	50	25	50
CP2-75	90	75	50	-
CP2-100	125	100	-	75
CP2-200	170	200	75	100
CP2-350	200	350	125	125

* Specifications are for general guidance only and application parameters must be checked for suitability.

Length (")	A (mm)	B (mm)	C (mm)
9¾	248	62	30
10	254	62	30
19½	496	62	30
20	508	62	30
29¼	743	62	30
30	762	62	30
39	991	62	30
40	1016	62	30

Part Number

Code	Micron	Diameter		Length
		Inner (mm)	Outer (mm)	
CP2	01, 03, 05, 10, 25, 50, 75, 100, 200, 350	30	62	248 (9¾) 254 (10) 496 (19½) 508 (20) 743 (29¼) 762 (30) 991 (39) 1016 (40)

Packaging

Length (")	Box	
	Quantity	Weight (kg)
9¾ / 10	50	8
19½ / 20	25	8
29¼ / 30	25	12
39 / 40	25	16

e.g. CP2-25-30*62*248



Chemical Compatibility

In practice, filter chemical compatibility is influenced by formulation as well as user conditions. It is best to run a filter compatibility in application before use.

	@ 20 °C	@ 60 °C
Acetic acid (conc.)	C	C
Acetone	C	LC
Acetonitrile	C	LC
Ammonium hydroxide 8N	C	C
Aniline	C	LC
Aqueous ammonia 15.5N	C	C
Benzene	LC	NC
Benzoic acid	C	LC
Benzyl alcohol	C	LC
Boric acid (saturated)	C	C
Butyl acetate	LC	NC
Butyl alcohol	C	C
Carbon tetrachloride	NC	NC
Carbonic acid	C	RF
Cellosolve acetate	C	C
Chloroform	LC	NC
Chromic acid (10%)	C	LC
Copper sulphate	C	LC
Critic acid (10%)	C	C
Cyclohexane	LC	NC
Cyclohexanone	LC	NC
Deionised water	C	C
Dichlorobenzene	LC	LC
Dimethyl formamide	C	LC
Dioxane	LC	NC
Distilled spirits	C	C
Ethanol	C	C
Ethyl acetate	LC	NC
Ethylene glycol	C	C
Ethylene oxide	LC	LC
Formaldehyde (37%)	C	C
Formic acid (conc.)	C	RF
Glycerol	C	C
Heptane	LC	NC
Hexane	LC	NC
Hydrochloric acid (conc.)	C	C
Hydrofluoric acid (40%)	C	LC
Hydrogen peroxide (30%)	C	RF
Iron Chloride	C	C
Kerosene (lamp oil)	C	LC
Methanol	C	C
Methyl acetate	LC	NC
Methyl ethyl ketone	C	LC
Methyl iso-butyl ketone	C	LC
Naphtha	LC	NC
Nitric acid (conc.) 15.8N	RF	NC
Nitric acid 2N	C	LC
Ozone 3mg/l	C	RF
Paraffin	C	C

C	Compatible	LC	Limited Compatibility
NC	Not Compatible	RF	Refer to Manufacturer

	@ 20 °C	@ 60 °C
Phenol	LC	LC
Phosphoric acid (70%)	C	LC
Potassium dichromate	C	LC
Potassium hydroxide 3M	C	C
Potassium permanganate	C	LC
Propan-2-ol, 60:40 H2O	C	C
Pyridine	C	LC
Sodium carbonate 0.5N	C	C
Sodium chloride	C	C
Sodium bicarbonate 0.1M	C	C
Sodium hydroxide 7N	C	C
Sodium hypochlorite	C	LC
Sulphuric acid (conc.) 35N	RF	RF
Sulphuric acid 20%	C	C
Tetrahydrofuran	LC	RF
Toluene	LC	NC
Trichloroacetic acid 5N	C	LC
Trichloroethylene	LC	NC
Turpentine	C	LC
Xylene	LC	NC

Viscosity

One of the biggest factors affecting the configuration of filtration equipment is the viscosity of the filtrate, i.e. the higher the viscosity, the slower the flow and the larger the system requirement. For filtrate other than water, divide the flow rate by the factors shown.
















Viscosity CPS	Conversion Factor
1	1
100	.85
200	.58
400	.35
600	.25
800	.17
1,000	.16
1,500	.11
2,000	.08
4,000	.05
6,000	.035
8,000	.026
10,000	.021

Note: A serious effort has been made to provide accurate information in this brochure, and, at the time of print, is produced to the best of Filerder's knowledge. However, as in all publications, the possibility exists for errors and misprints in the text. Variations in certification, compliance and recommended applications / performance may also occur depending on changes in legislation, materials and process of construction, and/or additional knowledge gained. Prior to order placement, the Buyer will ensure that the application parameters and recommended products are suitable and safe for the intended use and installation environment. A full copy of Terms & Conditions can be found at www.filerder.co.uk © 2018


'Filerder' and 'Filerder - experts in filtration' are registered trademarks of Filerder Filter Systems Ltd.


Product Brochures



	Reverse Osmosis Components
	Stainless Steel Filter Housings
	Plastic Filter Housings
	Carbon & Resin Cartridges
	Depth Filtration
	Reverse Osmosis Systems
	Pressure Vessels & Media
	High Flow Filtration
	Water Softeners
	Stainless Steel Cartridges
	UV Systems
	Food Service
	Large Diameter Filtration
	Filtration & Water Treatment Rental
	Installation & Servicing

Application Brochures

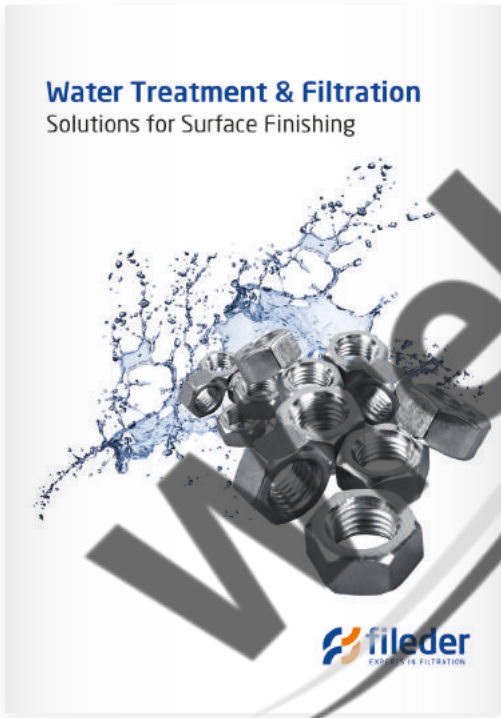

	Solutions for Bacteria & Parasites
	Solutions for Hospitals
	Solutions for Beverage Production
	Solutions for Surface Finishing
	Solutions for Food & Dairy Production
	Solutions for Chemical Production
	Solutions for Microelectronics
	Solutions for Buildings & Facilities Management

Contact us

Filerder Filter Systems Ltd

20/20 Business Park

Maidstone, Kent

ME16 0LS

Phone: 01622 691886

Fax: 01622 621932

Email: info@filerder.co.uk

Website: www.filerder.co.uk

