


# MIOLED È MIOLED AL2



MIOLED

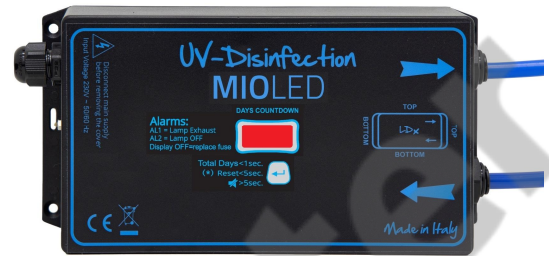

MIOLED AL2 (coming soon)

GENERAL INFORMATION	
Max. Flow	2.5 l/m
UVC transmittance	99%- 1 cm
Water temperature range	5-50° C
Total consumption	8.5 W
Lifespan	5000 hr
IN-OUT Fittings	Rapid connection 8mm Including: (1pc adapter 3/8" M, 1pc adapter 3/8" F)
Mounting	Vertical / horizontal
Integrated Flow Switch	Yes
Max. working pressure	6 bars g







SITALED LD inside	
Material	Stainless steel 304
Protection class	IP 54
Replaceable Led Board	Yes






UV BOX	MIOLED	MIOLED AL2 (coming soon)
Material	Black Polypropylene	
Dimensions	210 x 105 x 65	215 x 215 x 90 mm
Protection class	IP54	
Ambient temperature range	5 . 45 °C	
Power supply	230 V - 50/60 Hz on request: 115V . 50/60 Hz 12Vdc - 24 Vdc	8-36 Vdc
Power supply cable	1 m	1 m
Feed plug	Schuko (standard), UK, AUS/NZ, or passing wires	Passing wire
Monitor display	Status LED	Digital SITA
Days meter	NA	Yes for total system life
Resettable days meter	NA	Yes for led life control
Audio alarm	NA	With silence options

Rev.2

# MIOLED È MIOLED AL2

KIT INCLUDED	
 <p>2X</p>	 <p>1X</p>
 <p>2X</p>	 <p>1X</p>
 <p>1X</p>	 <p>1X</p>

EXAMPLE OF INSTALLATIONS	
	
	

Rev.2