




AA

Double Open Ended

Open-end gaskets, for use with housings containing a knife edge seal mechanism.

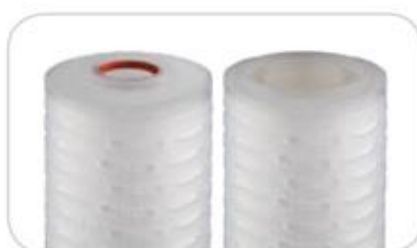

CG

213 with Closed Recess

Single internal O-ring, seals onto housings that have a spigot.



EG / MG

222/224 with Closed Recess

Double external O-rings seal into female housing receiver with a closed, recessed end, which is for housings with spigots.



EH / MH

222/224 with Fin Adaptor

Double external O-rings seal into female housing receiver whilst the Fin locates into housing plate holes to maintain vertical orientation.



FG

226 with Closed Recess

Bayonet type tabs lock into female housing receiver whilst the recessed end locates into housings with spigots.



FH

226 with Fin Adaptor

Bayonet type tabs lock into female housing receiver whilst the Fin locates into housing plate holes to maintain vertical orientation.

Stainless Steel Encapsulated End-Caps



QG

222 with Closed Recess

Suitable for high temperature housings, the QG configuration is suitable for repeated sterilisation and offers one of the best seals possible with its double O-ring fitting and stainless steel insert.



ZH

226 with Fin Adaptor

Suitable for multi-round high temperature housings, the ZH configuration provides the most positive seal with double O-rings and twin locking tabs. The encapsulated stainless steel insert makes the Z fitting suitable for repeated sterilisation.